AD-A047 819   NAVAL RESEARCH LAB   WASHINGTON D C   F/G 8/10
MEASUREMENT OF THE ACOUSTIC IMPEDANCE OF THE OCEAN BOTTOM.(U)
SEP 77   W J TROTT

UNCLASSIFIED   NRL-MR-3601   SBIE-AD-E000 028   NL

END
DATE
FILMED
1 -78
DDC

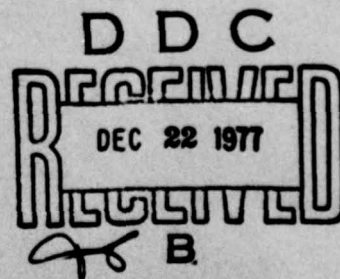(12) NW   AD-E000 028

Measurement of the Acoustic Impedance of the Ocean Bottom

W. James Trott

Transducer Branch
Acoustics Division

September 1977

D D C

RECEIVED

DEC 22 1977

B

NAVAL RESEARCH LABORATORY
Washington, D.C.

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NRL Memorandum Report 3601	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) MEASUREMENT OF THE ACOUSTIC IMPEDANCE OF THE OCEAN BOTTOM.		5. TYPE OF REPORT & PERIOD COVERED Final report on an NRL problem.
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) W. James Trott		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Research Laboratory Washington, D.C. 20375		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS NRL Problem S01-29
11. CONTROLLING OFFICE NAME AND ADDRESS Department of the Navy Office of Naval Research Arlington, VA 22217		12. REPORT DATE September 1977
		13. NUMBER OF PAGES 10
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Acoustic impedance
Ocean bottom impedance
Reflection coefficient
Scattering cross section

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

Transducer circuit theory is used to derive a means for measuring the impedance of a locally reacting surface. A directional source, linear or parametric, insonifies a finite area in a reference plane at which the impedance is specified. Computer programs are referenced for calculating the required diffraction constants and radiation impedance for the test geometry.

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE
1 JAN 73
S/N 0102-014-6601

i

MEASUREMENT OF THE ACOUSTIC IMPEDANCE OF THE OCEAN BOTTOM

Background

We describe a means for measuring the acoustic impedance of a
finite area of a boundary. The finite area A is the area in a reference
plane at which the impedance is measured, the effective area of
insonification. If the surface is rough the locus of the reference plane
is where the average displacement within A is zero. A directional
source is used to insonify the area A. Its radiated power P is

$$P = \int \frac{p^2(\theta, \phi)d^2}{\rho c} \, d\Omega = \frac{p_a^2 d^2}{\rho c} \, \Omega_o \qquad \text{Eq. 1}$$

p_a beam axis sound pressure

d axial distance from source

Ω_o solid angle of insonification

ρc wave impedance

$$A \cos \theta = \Omega_o \, d_1^2 \qquad \text{Eq. 2}$$

A area of insonification

θ angle of incidence to reference plane

d_1 axial distance from source to reference plane

Morse and Ingard[1] discuss scattering from surface irregularities in terms
of an area A. Their equation 8.3.6 assumes a plane wave incident on A for
a patch on a surface having a surface admittance β_o everywhere except A
and β on A.

For a rough surface having random variations in admittance, Fig
8.10, they show that the first term in their equation representing the
admittance variation has its maximum in the direction of the specular
reflection. The second term representing the roughness has its maximum, a
function of the correlation length to wave length, on a cone surrounding

Note: Manuscript submitted August 30, 1977.

1

the specular reflection angle. They suggest that the area A may be the
only area which is "illuminated" by the beam of sound. From this latter
suggestion we suggest that transducer circuit theory can be used to derive
a means for measuring the impedance of a locally reacting surface. The
impedance is determined at the specular angle; the roughness is determined
from the cone of maximum scattered sound. If the sound speed in the bottom
is greater than the sound speed in the ocean layer then the impedance will
show a sharp maxima at one angle of incidence, thus giving a measure of
one more parameter when the sound source is highly directional[2].
Alternatively if the density can be determined from core samples then the
speed of sound can be computed from the impedance and density.

Progress

The reference surface is treated as an equivalent circuit driven
by the Thévenin sound pressure or the pressure at an infinite impedance
surface. The impedance terms in the circuit are the radiation impedance
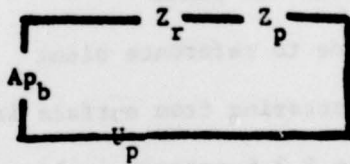and acoustic impedance-to-be-measured as referred to the reference plane, Fig. 1.

Fig. 1

A   effective area on the reference surface

P_b blocked or Thévenin pressure

Z_r radiation impedance of A

Z_p acoustic impedance to be measured

U_p volume velocity due to Z_p

By definition the diffraction constant, D, is the ratio of the blocked
to the free field pressure or

2

$$P_b = Dp_{ff}$$

P_{ff} is the beam axis sound pressure in equation 1 at the ocean bottom when d is the distance from the source to the bottom. The free field pressure is determined from a calibrated source or a hydrophone placed on the axis from the source to the area A. The boundary transmits a reflected pressure back toward the source in the case of normal incidence.

$$P_d = D(U_i - U_p) \frac{\omega\rho}{4\Pi d}$$

where

P_d reflected pressure measured at a distance d back on the axis normal to A.

U_i volume velocity of the incident free sound field

ω angular frequency

ρ density of the acoustic medium

$$\frac{\omega\rho}{4\Pi d} = \frac{\rho c}{2 d \lambda}$$

and $U_i = Ap_{ff}/\rho c$

   ρc the wave impedance

Fig. 1

$$Z_p = (ADp_{ff}/U_p) - Z_r \qquad \text{Eq. 3}$$

and in Eq. 3

$$U_p = (Ap_{ff}/\rho c) - (2d\lambda p_d/D\rho c) \qquad \text{Eq. 4}$$

$$Z_p = ADp_{ff}\rho c[Ap_{ff} - 2d\lambda p_d/D]^{-1} - Z_r \qquad \text{Eq. 5}$$

The diffraction constant D is calculated for the geometry of the measurement surface. It is calculated, as a radiation problem, utilizing one of the computer programs SHIP or CHIEF.

3

As stated previously Morse and Ingard assume a plane-wave over
the area A. In this approach the sphericity of the wave can be included
in the calculation of the diffraction constant D. From the method of
images one can readily see that the incident wave sphericity applies to
the reflected wave.

If the effective area A has a radius a and ka $>$ 10, $k = \frac{\omega}{c} = \frac{2\pi}{\lambda}$,
the wave number, then $Z_r \rightarrow \rho c$ and the diffraction constant D = 2. For this
frequency range the area A can be in an infinite rigid baffle or unbaffled;
Z_r and D are unchanged. Thus Eq. 5 for the condition ka $>$ 10 becomes

$$Z_p = \left[\frac{Ap_{ff} + d\lambda p_d}{Ap_{ff} - d\lambda p_d}\right] \rho c \qquad \text{Eq. 6}$$

This fact is important to the measurement of the acoustic impedance
of the ocean bottom. The impedance of the region around A (not insonified) has
no effect on the measurement when ka is large and the boundary is locally
reacting.

The above has been derived for normal incidence of the sound on the
ocean bottom. For specular reflection A is obtained from Eq. 2 and the
diffraction constant D is a function of the angle of incidence.

For other than normal incidence the impedance can be expressed
as Zcos θ, Eq. 6.3.5 in reference 1. Stickler[2] shows that when the sound
speed in the bottom (c_b) is greater than the speed of sound in the ocean
layer (c_o) there exists a critical angle θ_c

$$\theta_c = \sin^{-1}(c_o/c_b)$$

and

$$z(\theta) = (\sin^2\theta_c - \sin^2\theta)^{-\frac{1}{2}}$$

4

which is typically in the range of 60° incidence. His $z(\theta)$ is a normalized, dimensionless impedance and the bottom is treated as a fluid medium.

Equation 5 can be rewritten to yield a measure of the back scattering cross section σ

$$\sigma = \frac{p_d^2 d^2}{p_{ff}^2} = \frac{A^2 D^2}{4\lambda^2} \left[1 - \frac{D\rho c}{z_p + z_r}\right]^2 \qquad \text{Eq. 7}$$

thus showing that the back scattering cross section is a function of the impedance of the bottom.

The reflection coefficient r

$$r = \frac{p_d}{p_{ff}} = \frac{AD}{2d\lambda} \left[1 - \frac{D\rho c}{z_p + z_r}\right] \qquad \text{Eq. 8}$$

Suppose in Eq. 8, for normal incidence, the boundary is in the near field of the source-receiver. The incident pressure p_{ff} is the average pressure in the collimated beam and the area A is the area of the piston source and the area of insonification. The average wave impedance is ρc. The radiated power of the reflected wave

$$P = \frac{p_{ref}^2 A}{\rho c}$$

In Eq. 8 the radiated power of the reflected wave

$$P = 4\pi p_d^2 d^2 / R_\theta \rho c$$

R_θ is the directivity factor for the insonified area A. For plane wave incidence and reflection

$$R_\theta = \frac{4\pi A}{\lambda^2}$$

5

and the relationship between p_{ref} and p_d can be shown to be

$$p_d = p_{ref}\left(\frac{A}{d\lambda}\right)$$

p_{ff} is now p_{inc} the incident sound pressure. Eq. 8 can be rewritten as

$$\frac{p_{ref}}{p_{inc}} = \frac{D}{2}\left[1 - \frac{D\rho c}{z_p + z_r}\right]$$

For normal incidence $D = 2$ and $Z_r = \rho c$

and $r = \dfrac{p_{ref}}{p_{inc}} = \dfrac{Z_p - \rho c}{Z_p + \rho c}$

the familiar equation for the reflection of a plane wave.

We have assumed, as a first approximation, that D and Z_r can be derived for a reference plane from which the average displacement of the rough bottom is zero. We have assumed that propagation theory could be facilitated by assuming a plane boundary to the extent of the insonified area A, neglecting short range roughness. This assumption must be analyzed by one more knowledgeable in propagation theory.

Equations 5 and 6 describe a means for measuring the acoustic impedance of a finite area of the ocean bottom and specifying it at a reference plane. In Eq. 5, the size of the area A is determined by the directivity of the source. Impedance, as a function of penetration depth, is determined from pulsed sound measurements by analyzing the elongated reflected pulse. The impedance data as a function of depth is that measured at the reference plane as a function of time in the reflected pulse. The impedance and sound speed in the first layer is used to determine the impedance at the next layer from the value measured at the reference plane.

6

The use of a directional source resolves the ambiguity of angle and depth resolution that exists when an omnidirectional source is used.

For measurements at other than the specular angle Eq. 5 is changed to

$$Z_p = AD_1 P_{ff} \rho c \left[A P_{ff} - 2d\lambda P_d / D_2 \right]^{-1} - Z_r \qquad \text{Eq. 9}$$

where D_1 refers to the angle of incident sound, D_2 refers to the angle of reflected sound measurement and Z_r is the radiation impedance calculated for the incident sound phase distribution on the area A. D_1, D_2, and Z_r as a function of incident angle can be calculated with CHIEF.

The source should have a beam width of about 10° to obtain a reasonable angular resolution. At higher frequencies this is possible with a large piston source. At frequencies in the range of 1 kHz and below a parametric source will be required.

Summary

The acoustic impedance of a boundary can be determined by pulsed sound measurement techniques with a directional sound source and hydrophone or with a transducer and transmit-receive switch. Computer programs SHIP and CHIEF can be used to calculate the diffraction constant and the radiation impedance appropriate for the test geometry. Measurement data consists of incident free field pressure and reflected pressure in magnitude and phase and the effective area of insonification on a reference plane in region of the boundary. Measurements of the specular reflection should yield the impedance of the bottom as a function of the angle of incidence. For the condition that the sound speed in the bottom is greater than the sound speed in the

7

ocean layer the critical angle yields a measure of the sound speed in the bottom. This in combination with pulse time analysis of the reflected pulse measures the impedance at successive layer depths in the ocean bottom. Non-specular reflection measurements for normal incidence sound should yield a measure of bottom roughness when the roughness is of the order of the wave length of the incident sound. The technique is probably most applicable to shallow water propagation. Important advances often come from the realm between two scientific branches. It is hoped that this application of transducer equivalent circuit theory to the measurement of the characteristics of the ocean bottom is such an advance. The proposal is submitted for criticism and revision by those more familiar with the data requirements to describe propagation phenomena. If the approach is feasible an experiment should be designed for testing the theory.

References

1. Morse and Ingard, Theoretical Acoustics, Chapter 8, Mc-Graw Hill, 1968

2. D. C. Stickler, "Measurement of the sound speed in bottom layers.", J. Acous. Soc. Am. Vol. 57, p. 585, March 1975